


FULL HD 1080p

LED

IP NETWORK MONITOR



32IREDP

BUILT TO RUN 24 X 7 X 365 CONTINUOUSLY


OVERVIEW

The ORION Images released a new 32 inch network CCTV monitor with built-in Android 4.2 OS, Quad Core RK 3188, Cortex A9, 8GB internal memory and snap shot* capability.

FEATURES

- WiFi 802.11b/g/n Wireless
- Support RJ45, 10/100M LAN Network
- LED BLU (Back Light Unit) Display Monitor
- 3D Comb Filter / Deinterlace, Noise Reduction, Advanced Auto Power Recovery, Trigger Source Switching, Multi-Language Support
- Ethernet 1 In, WiFi Antenna, USB 2 In, BNC Video 2 In / 2 Out, VGA 1 In, HDMI 1 In, Audio 2 In, PC Stereo 1 In
- Built-In Speakers
- Wall and Ceiling Mounts
- 1920 x 1080p Full HD
- Metal Chassis

* Snap Shot feature is based on application support

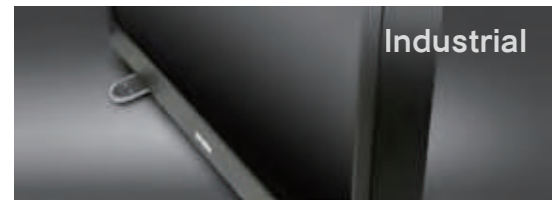

GSA

Contract No. GS-03F-0152X


www.avsupply.com | email: sales@avsupply.com | Ph: 858.565.1101

SPECIFICATIONS


32IREDP	
Display	
Screen Size	31.55 Inch
Max. Resolution	1920 x 1080 @ 60Hz
Pixel Pitch	0.36375 x 0.36375mm
Brightness	400cd/m²
Contrast Ratio	1300 : 1
Aspect Ratio	16 : 9
Viewing Angle (H/V)	178° / 178°
Display Color	16.7 Million
Response Time	< 25ms
Video System	NTSC / PAL
Interface	
RJ45	Built-In Android 4.2 OS, Quad Core RK3188, Cortex A9, 8GB Internal Memory WiFi 802.11b/g/n
Video In / Out (BNC Type)	2 In / 2 Out
HDMI In	1 In
VGA In (15Pin D-Sub)	1 In
Audio In (RCA Type)	2 Left & Right
PC Stereo In	1 In
Transmitter	
Remote Control	Yes
Audio	
Built-in Speakers	Yes (1W x 2)
Features	
Filter Type	3D Comb Filter
Deinterlacing	Yes
Noise Reduction Control (NR)	Yes
Advanced Auto Power Recovery	Yes
Auto Pixel Shift	Yes
Auto Source Sequencing	Yes
Trigger Sensor	Yes (NO / NC)
Multi Language	English, Spanish, French, German, Italian
General	
Outline Dimension (W x H x D)	28.82" x 19.15" x 6.30" (w/ stand)
Net Weight	12.70 kg (28.00 lbs)
Material / Color	Metal / Black
Desk Top Stand	Yes
Part / Labor	3year / 3year
Consumption: < On	< 52W
	AC100 ~ 240V(50/60Hz)
Operating Temperature	0° ~ 40° C / 32° ~ 104° F
Storage Temperature	-20° ~ 60° C / -4° ~ 140° F
Mounts	
VESA™ Mount Size	200 x 200mm
Wall	WB-2642
Ceiling	CMK-01 with FMA-01

*Design and specifications are subject to change without notice

INPUT INTERFACE

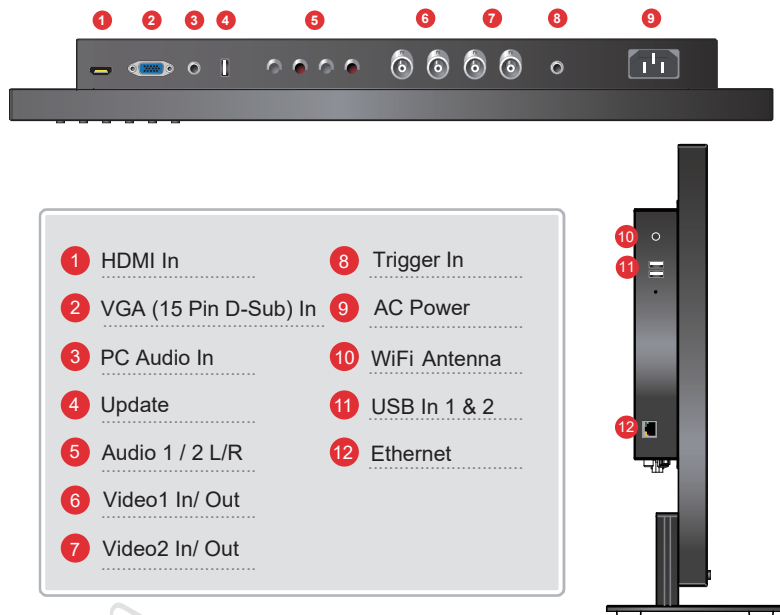


DIMENSIONS

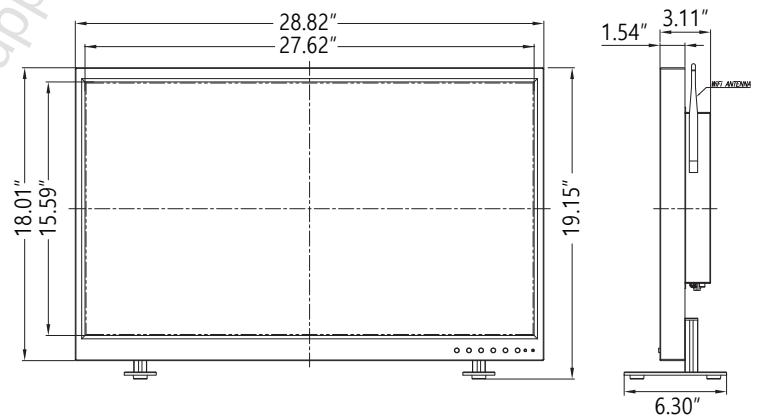

ADVANTAGES

IP NETWORK CONNECTION

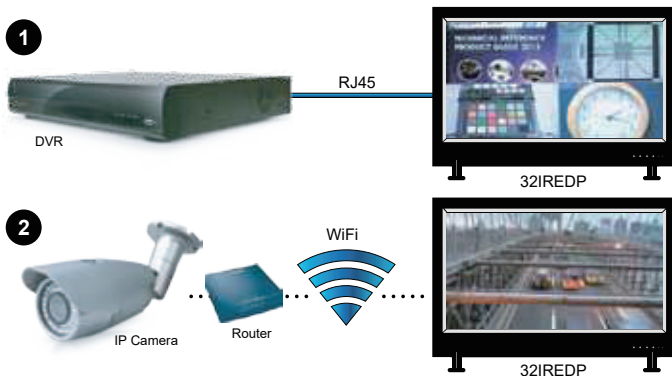

3 Use 32IREDP as desktop PC monitor

