



SPECIAL FEATURES


- 3.5 hour battery life
- Reverse mirror function
- Video output test pattern: Color bar chart & gray scale chart
- 3 ~ 4 hours continuous using time
- Auto shut off timer 1~15 minutes

SPECIFICATIONS

TM2P		
Display	Screen Size	2.5 Inch
	Max. Resolution	960 x 240 pixel
	Pixel Pitch	0.0525 x 0.1575mm
	Active Area	50.4(W) x 37.8(H) mm
	Brightness	230cd/m ²
	Contrast Ratio	300 : 1
	Pixel Type	Color TFT LCD
	Viewing Angle (H/V)	100°/ 90°
	Display Color	Full Color
Interface	Video System	NTSC / PAL
	Input Interface	1 x Video input (BNC type)
Features	Video output	1 x Video output (BNC type)
	Image Reverse	Left & Right Reverse Image
	Power Saving	Low Battery Consumption
	Test pattern Generator	9V Regular AAA battery x 6 Color Bar chart & Gray Scale Chart
Dimension	Outline Dimension (W x H x D)	98 x 70 x 46 mm 3.86" x 2.75" x 1.81"
	Net. Weight	0.18Kg (0.4lbs)
Cabinet	Material / Color	Black plastic
Warranty	Part / Labor	1year / 1year
Power	Consumption: < On	< 0.5W
	Electrical Ratings	AAA Battery(12V DC) x 6
Working Function		Wrist strap
		1 x Wrist strap
Accessories	Package Contents	AV input Cable x 1
		AV output Cable x 1

*Design and specifications are subject to change without notice

DIMENSIONS

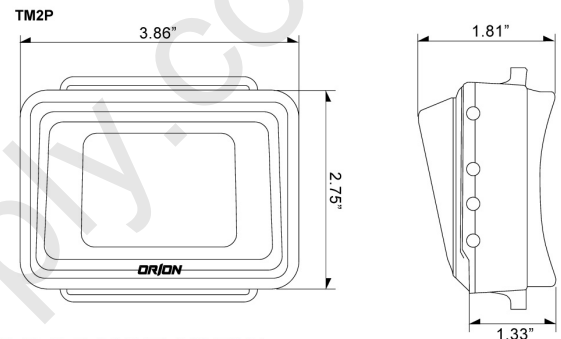

PRODUCT VIEW



Standard Wrist Strap




Main Function to Control OSD




Standard BNC Cable

OSD SETUP MENU

Our 2.5" LCD CCTV mobile test monitor is portable, light weight, 3.5 hour run time with auto shut off, navigation friendly on screen display (OSD) menu and can be worn around your wrist or hand held. With the Velcro wrist strap it becomes hands free and convenient to view images while preventing accidental damage of the unit making this a more efficient industry safe mobile test monitor.

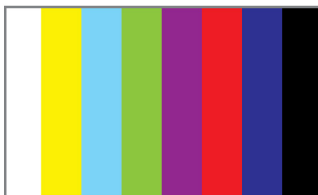

Color calibration

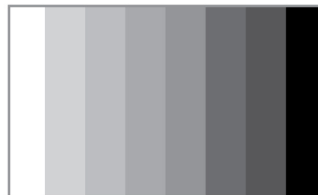

Grayscale calibration



Convenient wrist strap for easy use while on ladder